

*If you've been dreaming of
your own log home. . .*

*then it's time to talk to
Contemporary Log Homes. . .*



Contemporary
LOG
HOMES, llc
We Deliver Dreams!


Contemporary Log Homes

THE WEEKENDER - 540 sq. ft.

AND THE VERDE - 600 sq. ft.



The price is right with The Weekender and Verde, two of our smallest models. Designed so you have just the essentials - a perfect cabin in the woods for ski weekends and summer fishing trips. These are one bedroom units and will fill the needs of most anyone looking for a simple yet functional cottage. These models have truss roof systems

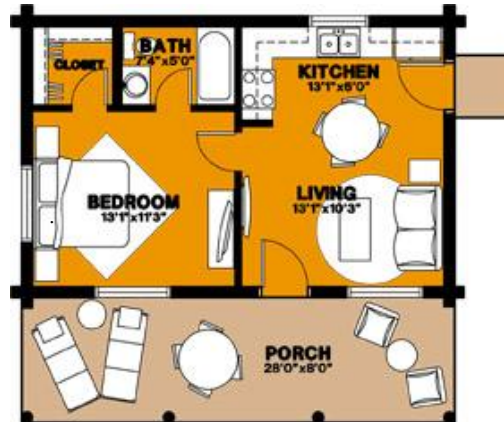

THE WEEKENDER MODEL FLOOR PLAN

TOTAL LIVABLE 504 SQ.FT.
PORCHES 224 SQ.FT.



THE VERDE MODEL FLOOR PLAN

TOTAL LIVABLE 600 SQ.FT.

The Weekender- 504 sq. ft /The Verde-600 sq. ft.

Material Package Price: Weekender - \$23,200.00

Material Package Price: Verde - \$27,250.00

STANDARD MATERIAL PACKAGE INCLUDES:

SILL PLATE:	2x8 pressure treated or redwood plate.
FLOOR SYSTEM:	2x floor joists with 3/4" T&G OSB or plywood sheathing & girder beams.
PORCH FLOORS:	2x floor joists with 2x6 decking.
LOG WALLS:	7" dia. Swedish cope, lodge pole pine and douglas fir mix.
INTERIOR PARTITIONS:	2x4 or 2x6 studs @ 24" o.c.
STAIRS:	2x12 stringers and treads.
LOG GUARDRAILS:	2" dia. pickets @ 5" o.c. with 4" dia. rail on stairways & 2nd floor balconies
ROOF SYSTEM:	2x roof rafters with 1/2" OSB roof sheathing (or 5/8" OSB where required by code).
PORCH ROOF SYSTEM:	2x roof rafters with 1/2" OSB roof sheathing (or 5/8" OSB where required by code).
FASCIA:	2x S1S2E spruce or pine with 1x4 shingle molding.
ROOFING:	30 yr. Architectural fiberglass shingles over 15 lb. roofing felt.
BASIC BUILDING HARDWARE:	Joist hangers, hurricane ties, roof straps, log wall bolts & construction adhesive between each course of logs.
CONSTRUCTION MANUAL:	A simple step by step "how-to" guide.
BLUEPRINTS:	Five complete sets of permit ready plans prepared by registered architects.

LOG FINISH MATERIALS:	"Sashco" products: Log Jam chinking for interior & exterior joints/seams. Capture exterior stain and Cascade exterior clear coat. Symphony (2 coats) interior clear coat finish.
TECHNICAL ASSISTANCE:	A Contemporary Log Home representative will assist the construction crew at the construction site in starting log walls from the first floor.
FREIGHT:	Included to the construction site if the materials are paid for prior to shipping in the AZ, CO, UT areas. Additional freight costs will apply for all other areas.

MANY POPULAR OPTIONS ARE AVAILABLE:

6x8 D-shaped logs	Pre-fitted Natural Hand Hewn Logs
8", 9", 10" & 12" diameter logs	Hand Peeled Machine Logs
Metal Roofing	Log Stairs
Window Packages	Door Packages
Heavy Timber Structures	Custom Design by Registered Architects

Thanks for taking the time to consider us as part of your dream. Call one of our representatives today or anytime. We don't have a clock when it comes to customer service!




Western Region
 2023 East University Drive
 Suite 2
 Tempe, AZ 85281
 (480) 894-1715

Eastern Region
 1060 Old Plank Road
 Waterford, PA 16441
 (814)796-6883

Visit us on the web at www.chllc.com
 Email: deliverdreams@chllc.com

Believe!

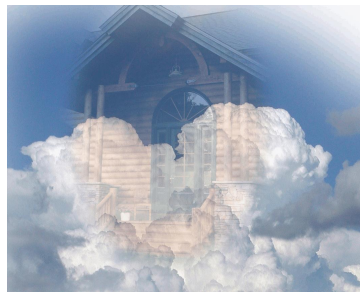

Contemporary
KG
HOMES,
llc
We Deliver Dreams!
